


Pt 100 PROBE


*Pt100 probe
with connection cable
protective cladding \varnothing 6 mm*

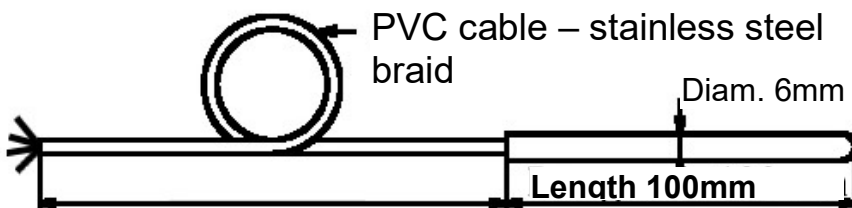

SPECIFICATIONS

Ceramic Pt 100 probe
Class A, single winding
Operating temperature: -50°C to $+90^{\circ}\text{C}$
Protective cladding: 316L stainless steel, diam.=6
Dimension (mm): Diam.=6, L=100 (usable length)
Cable: PVC, stainless steel braid (length to be determined)
Connection on 4 wires

CONNECTION

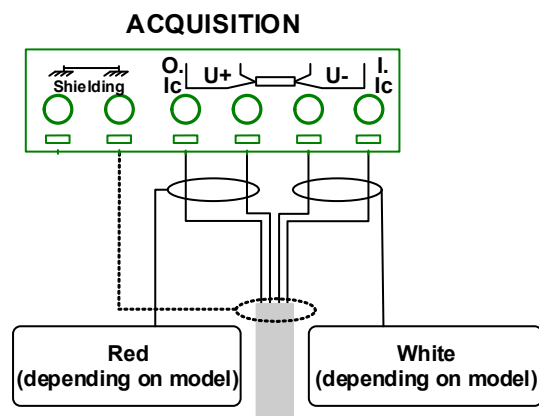

The specifications described in this document are subject to change by the manufacturer without notice.